


# 可視光LEDライン照明器




## Flat Power® VLL-1

エリア照度均一!


照射エリア120mmX10mmをコンパクトなヘッドで実現  
独自の光学系により均一な照度プロファイル  
高周波PWM点灯とストロボ発光の電源を標準設定

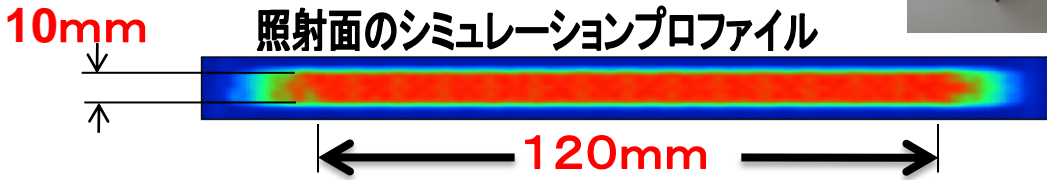

VLL-1 ライン方向のプロファイル @IF=680mA WD=100mm

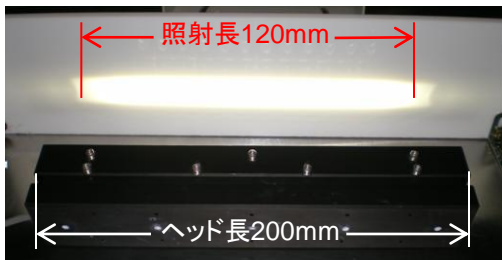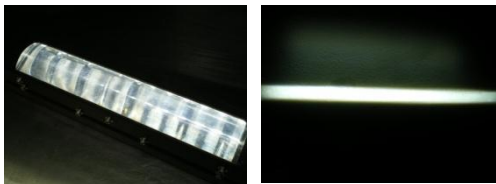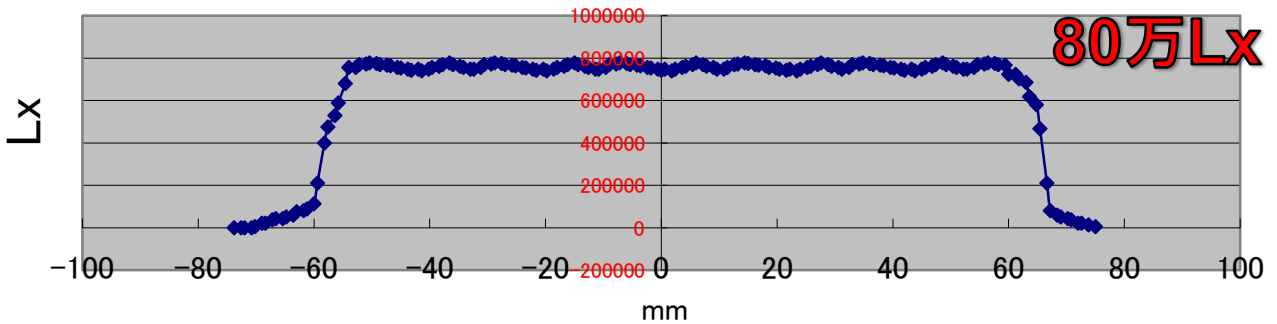

幅方向のプロファイル @IF=680mA WD=100mm

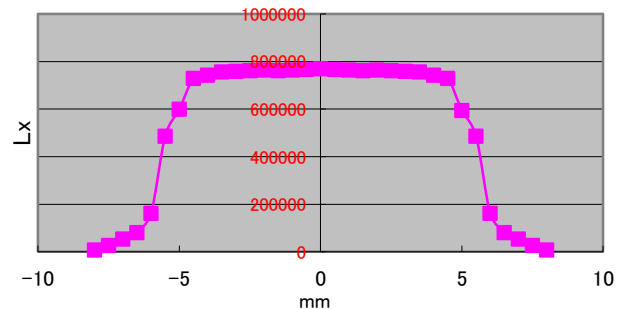

専用電源ユニットは高周波PWM点灯を標準装備しています。

型式:NLP-1



前面

背面

幅80mm x 奥行200mm x 高さ135mm  
使用電源: AC85V~132V

【用途】

画像処理用光源

**NACACUE**  
株式会社 仲久

〒601-8204 京都市南区久世東土川町194-1  
TEL075-934-4178 FAX075-934-1870  
www.nacacue.co.jp

外形寸法、重量、消費電力  
<ヘッド部>  
L200mm W35mm H70mm  
重量500g  
消費電力: 25W (LED数12個)

製品仕様は予告なく変更する場合があります。

**NACACUE**

# Line Shape Lighting with visible LED Light source


## FlatPower® VLL-1

## High Power




Compact head provides line bright area: 120mm x 10mm

High uniformity of intensity by unique optical design

High frequency PWM and constant current control

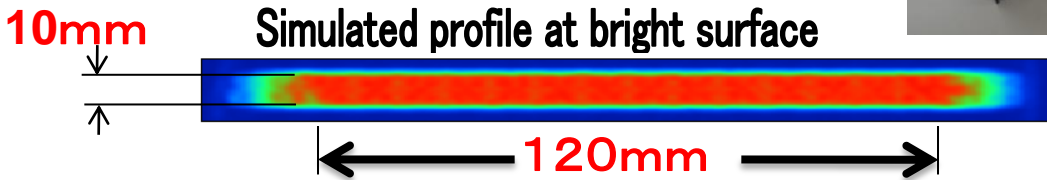

VLL-1 measured profile at line direction axis @IF=680mA WD=100mm

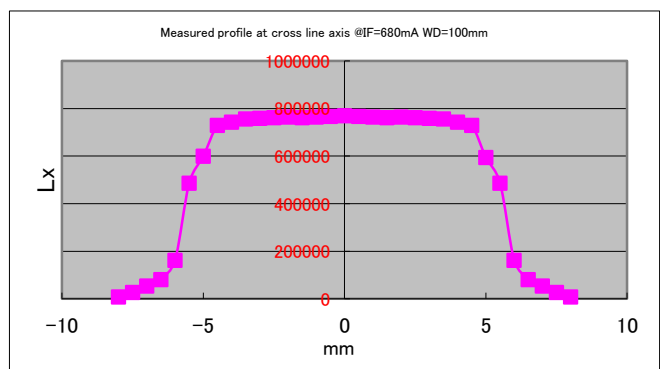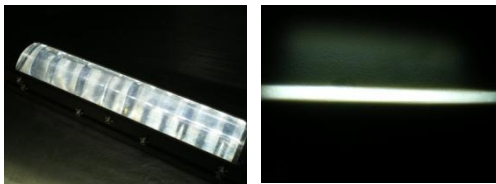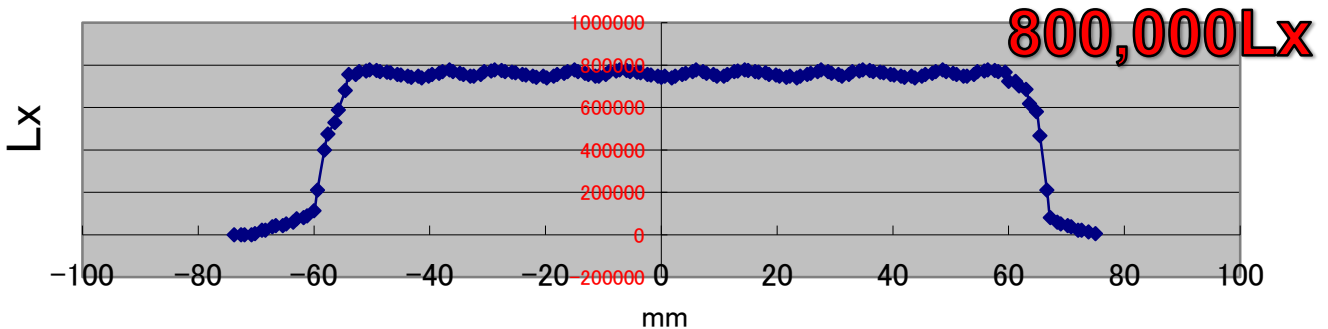

Power Supply provides both PWM and constant current control.

Type: NLP-1



Front

Back

Width: 80mm x Depth: 200mm x Height: 135mm  
Operation Voltage: AC85V~132V

Bright width 10mm



Head width: 34mm



Dimensions, Weight, Electric power consumption  
<Head part>  
L200mm W35mm H70mm  
Weight: 500g  
Power consumption: 25W (12 LED chips)

[Be used for]  
LED Lighting for Industrial Use.

**NACACUE**

**NACACUE CORP.**  
Higashitsuchikawa-cho, Kuze, Minami-ku,  
Kyoto 601-8204, JAPAN.  
Tel. +81-75-934-4178  
Tax. +81-75-934-1870  
<http://www.nacacue.co.jp>

Product specifications are subject to change without notice.